



DLB 2-14n

Outdoor Wireless Device

DLB 2-14n

LigoWave's DLB 2-14n delivers the highest performance and stability available in the 2.4 GHz CPE class. This product combines a highly advanced radio core containing MIMO 2x2 technology with an integrated, high-gain, dual polarization directional antenna. The feature-rich operating system is optimized for ultra-high performance wireless communications while optionally allowing compatibility with older 802.11 b/g standards devices.

The smart dynamic polling based protocol (iPoll 3) ensures reliable communication even in congested areas with 64 client devices connected to a base-station.

Equipped with LigoWave's dual firmware image feature, remote software upgrades are assured even if a power failure interrupts the process. The device will restart using the prior firmware in the event of an upgrade failure.


The enclosure is made of polycarbonate plastic with UV inhibitors to provide years of outdoor exposure in direct sunlight without cracking. The DLB 2-14n was designed and tested to meet an IP-66 rating as well as vibration, temperature, drop, salt, fog, and electrical surge standards to ensure a high level of reliability unsurpassed in the industry. It is equipped with a grounding lug and a grounded 24-volt PoE to allow a professional installation, resistant to electrical surges.

The shape of the enclosure is now smaller, lighter but retains the IP-66 weather protection rating. Smaller packaging reduces freight costs. The new design has no metal parts, which makes the device lighter and corrosion resistant.



New form factor

The shape of the enclosure is now smaller, lighter but retains the IP-66 weather protection rating. Smaller packaging reduces freight costs and makes them less obvious. The new design has no metal parts, which makes them lighter and corrosion resistant.




New mounting

The adjustable mounting bracket is very easy to assemble and install. It consists of two easy to connect parts that allow tilting the device up and down when installing on a pole. A metal strap is included to securely tighten the device. This design includes additional reinforcements and thicker materials to ensure survival in extreme climate conditions.

OS

The DLB OS is a highly functional and easy to use operating system. This powerful and flexible operating system ensures flawless operation of all DLB hardware devices and effortless setup for those deploying the networks.

- Smart polling data transmission protocol (iPoll 3)
- Dual-firmware image support
- Responsive HTML 5 based GUI
- 170 Mbps capacity
- 80,000 PPS rate
- IPv6 support
- WNMS compatible

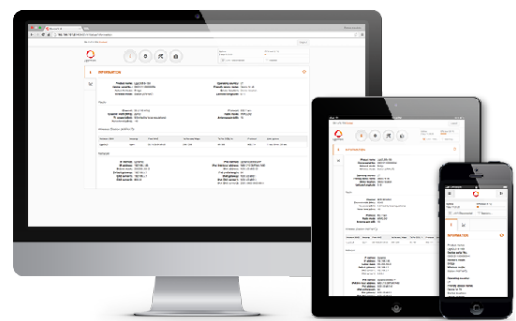

WNMS

WNMS is a FREE enterprise grade Wireless Network Management System. A single software solution simplifies a large number of management and monitoring tasks for network administrators. LigoWave's comprehensive network management system supports several thousands of nodes. Multiple networks may be maintained and monitored using one server. A rich feature set helps to diagnose network problems effectively, visualize networks on a map, perform scheduled firmware upgrades automatically, track states of devices, get failure alerts, and collect statistics. The Web-based system environment supports multi-user accounts. Several administrators may manage different networks on the same server, without having access to each other's equipment. WNMS is available as a stand-alone version for Linux and Windows servers, as a cloud-based system and as a mobile application for Android devices.

Specifications

Product/ distance recommendation	PTMP mode	PTP mode	PTP mode (full capacity)
DLB 2-14n	7 km/ 4.35 mi	10 km/ 6.21 mi	8 km/ 4.97 mi

Wireless

WLAN standard	IEEE 802.11 b/g/n, iPoll (proprietary)
Radio mode	MIMO 2x2
Radio frequency band	2.412 - 2.462 GHz (FCC 2.412 - 2.462 GHz)
Transmit power	Up to 31 dBm (country dependent)
Receive sensitivity	Varying between -96 and -74 dBm depending on modulation
Channel size	5,10, 20, 40 MHz
Modulation schemes	802.11 g/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11 b: DSS (CCK, DQPSK, DBPSK)
Data rates	802.11 n: 300, 270, 240, 180, 120, 90, 60, 30 Mbps 802.11 g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11 b: 11, 5.5, 2, 1 Mbps
Error correction	FEC, Selective ARQ
Duplexing scheme	Time division duplex

Receive sensitivity (dBm)	802.11N/ iPoll (20/ 40 MHz)	15 Mbps	30 Mbps	45 Mbps	60 Mbps	90 Mbps	120 Mbps	135 Mbps	150 Mbps
		-95	-93	-91	-88	-83	-80	-78	-77
802.11g	30 Mbps	60 Mbps	90 Mbps	120 Mbps	180 Mbps	240 Mbps	270 Mbps	300 Mbps	
	-92	-90	-87	-84	-81	-77	-76	-74	
802.11g	6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps	
	-96	-95	-94	-92	-89	-85	-81	-79	

Output power (dBm - combined)	802.11N/ iPoll (20/ 40 MHz)	15 Mbps	30 Mbps	45 Mbps	60 Mbps	90 Mbps	120 Mbps	135 Mbps	150 Mbps
		31	30	29	28	27	27	26	25
802.11g	30 Mbps	60 Mbps	90 Mbps	120 Mbps	180 Mbps	240 Mbps	270 Mbps	300 Mbps	
	30	29	28	27	27	26	25	24	
802.11g	6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps	
	31	30	29	28	27	27	26	26	

Antenna

Type	Integrated directional dual - polarized panel
Gain	14 dBi

Wired

Interface	10/100 Base-T, RJ45
-----------	---------------------

Software

Wireless operating modes	Access point (auto WDS), access point (iPoll 3), station (WDS, iPoll 3), station (ARP NAT)
Wireless techniques	Smart station polling, smart auto-channel, adaptive auto modulation, automatic transmit power control (ATPC)
Wireless security	WPA/WPA2 personal, WPA/WPA2 enterprise, WACL, user isolation
Wireless QoS	4 queues prioritization on iPoll 3
Network operating modes	Bridge, router IPv4, router IPv6
Network techniques	Routing with and without NAT, VLAN
WAN protocols	Static IP, DHCP client, PPPoE client
Services	DHCP server, SNMP server, NTP client, router advertisement daemon, ping watchdog
Management	HTTP(S) GUI, SSH, SNMP read, WNMS, Telnet
Tools	Site survey, link test, antenna alignment

Physical

Dimensions (head)	Length 205 mm (8 "), width 205 mm (8 "), height 45 mm (1.7 ")
Weight	Unit: 700 g (24.7 oz)
Mounting	Combination wall / pole mount included

Power

Power supply	12 - 24 VDC passive PoE (24 V passive PoE adapter is included in the package)
Power source	100 – 240 VAC
Power consumption (max)	4.5 W

Environmental

Operating temperature	-40°C (-40 F) ~ +65°C (+149 F)
Humidity	0 ~ 90 % (non-condensing)


Management

System monitoring	SNMP v1/2c/3 server, Syslogs, system alerts via e-mail and SNMP trap
-------------------	--

Regulatory

Certification	FCC/IC/CE
---------------	-----------

Antenna specifications

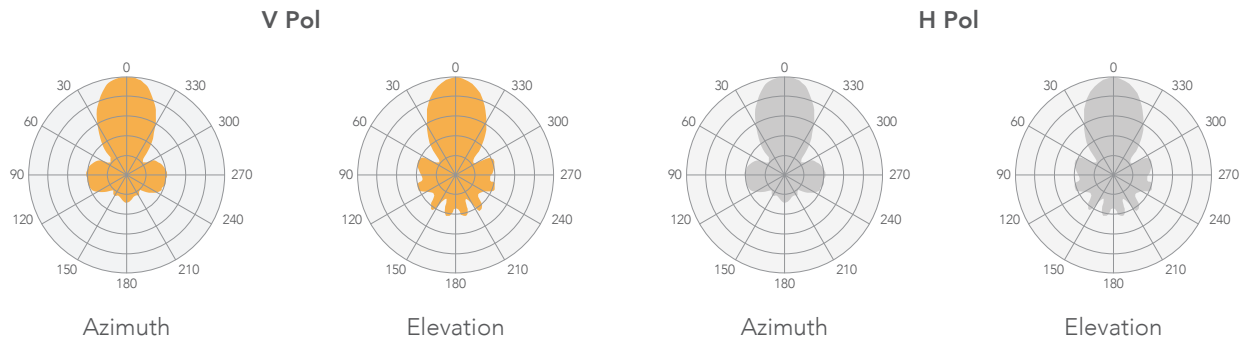

Internal Antenna

Frequency range	2.4 - 2.5 GHz
Gain	14 dBi
Polarization	Dual linear
Cross-pol Isolation	38 dBi
VSWR	1.8:1
Azimuth beamwidth (H pol)	34 deg
Azimuth beamwidth (V pol)	36 deg
Elevation beamwidth	36 deg